



Oras Nova

Installation and maintenance guide






4-7



8-12



13-14



15-19





20



7401



I (ISO 3822)
 EN 1111
 100 - 1000 kPa
 0.25 / 0.26 l/s (300 kPa)
 180 kPa (0.2 l/s)
 max. +65°C

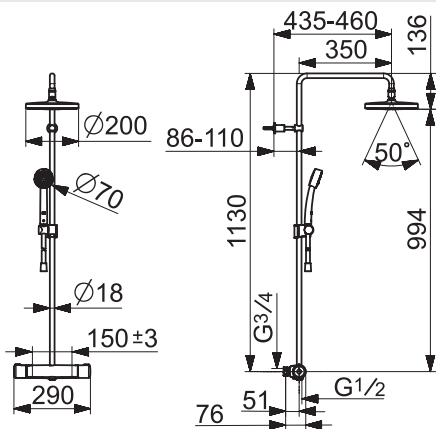

mpi.oras.com/7401

7402, 7402-33



I (ISO 3822)
 EN 1111
 100 - 1000 kPa
 0.3 / 0.26 l/s (300 kPa)
 180 kPa (0.2 l/s)
 max. +65°C

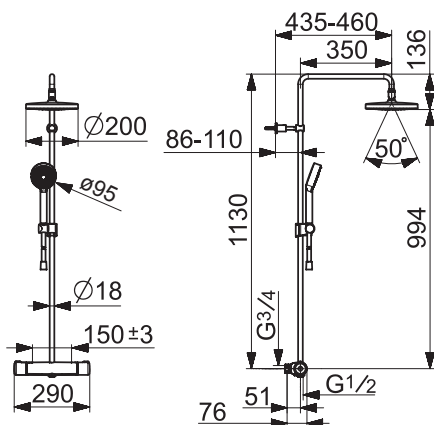

mpi.oras.com/7402

7402U, 7402U-33



I (ISO 3822)
 EN 1111
 100 - 1000 kPa
 0.25 / 0.26 l/s (300 kPa)
 180 kPa (0.2 l/s)
 max. +65°C

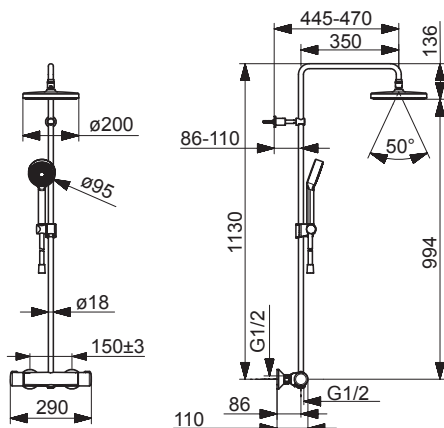

mpi.oras.com/7402U

7408



I (ISO 3822)
 EN 1111
 50 - 1000 kPa
 0.25 / 0.26 l/s (300 kPa)
 180 kPa (0.2 l/s)
 max. +65°C

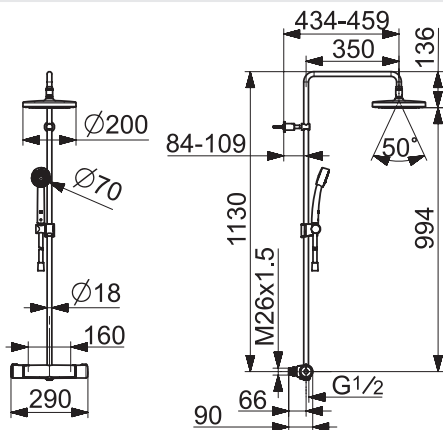

mpi.oras.com/7408

7409



I (ISO 3822)
 EN 1111
 50 - 1000 kPa
 0.25 / 0.26 l/s (300 kPa)
 180 kPa (0.2 l/s)
 max. +65°C

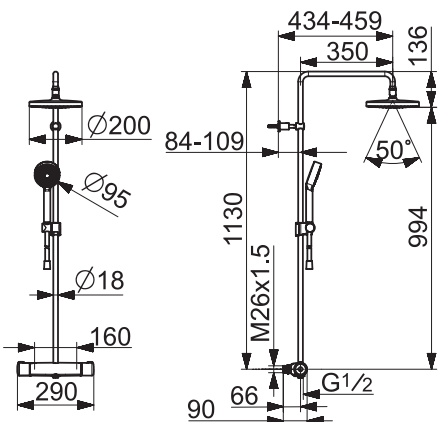

mpi.oras.com/7409

7418

I (ISO 3822)
 EN 1111
 50 - 1000 kPa
 0.25 / 0.26 l/s (300 kPa)
 180 kPa (0.2 l/s)
 max. +65°C

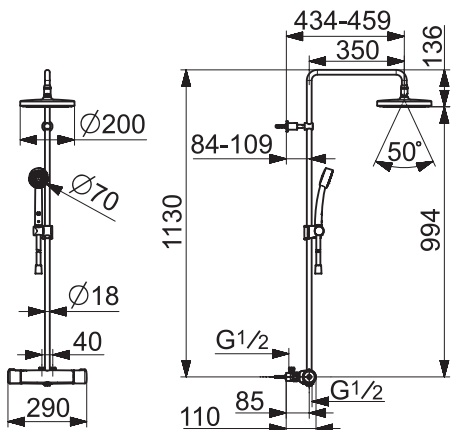


mpi.oras.com/7418



7419



I (ISO 3822)
 EN 1111
 50 - 1000 kPa
 0.25 / 0.26 l/s (300 kPa)
 180 kPa (0.2 l/s)
 max. +65°C

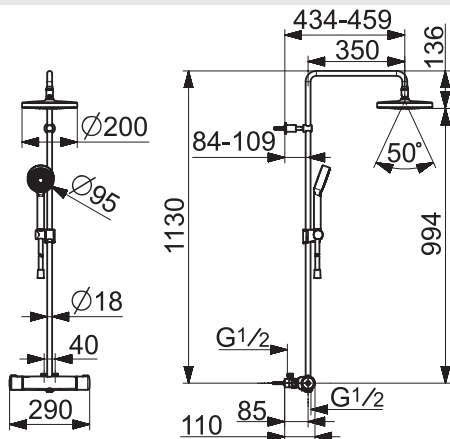

mpi.oras.com/7419

549



I (ISO 3822)
 EN 1112
 100 - 1000 kPa
 0.25 / 0.26 l/s (300 kPa)
 180 kPa (0.2 l/s)
 max. +65°C

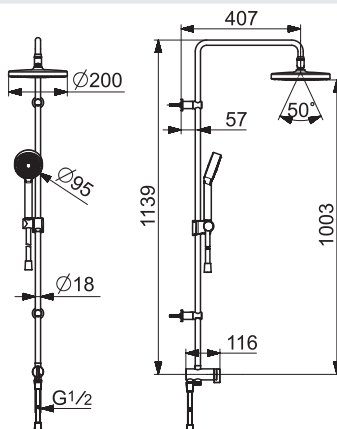

mpi.oras.com/549

7403U



I (ISO 3822)
 EN 1111
 100 - 1000 kPa
 0.25 / 0.26 l/s (300 kPa)
 180 kPa (0.2 l/s)
 max. +65°C

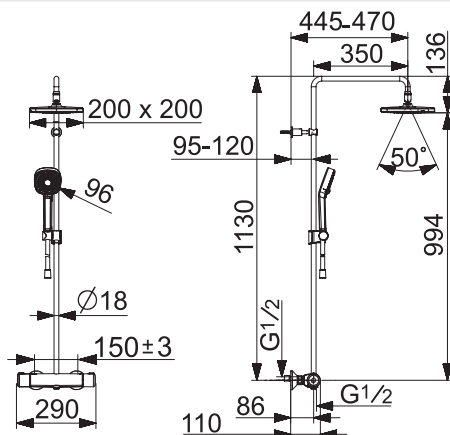

mpi.oras.com/7403U

7403



I (ISO 3822)
 EN 1111
 100 - 1000 kPa
 0.3 / 0.26 l/s (300 kPa)
 180 kPa (0.2 l/s)
 max. +65°C

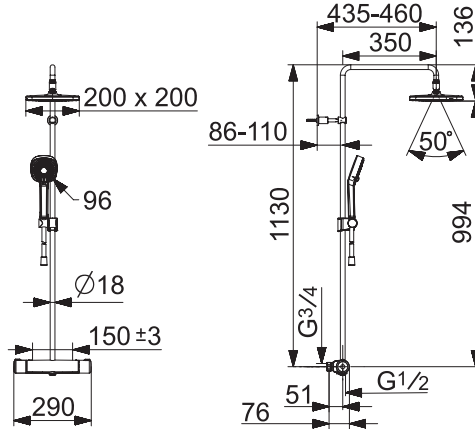

mpi.oras.com/7403

7405



I (ISO 3822)
 EN 1111
 100 - 1000 kPa
 0.3 / 0.26 l/s (300 kPa)
 180 kPa (0.2 l/s)
 max. +65°C

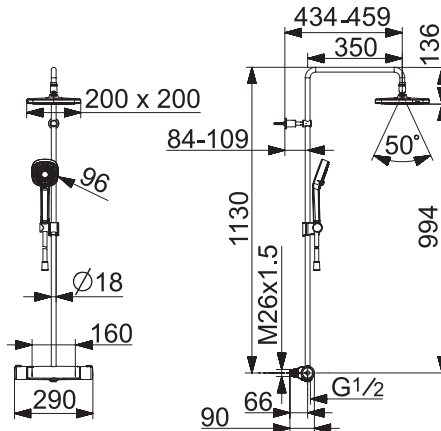











mpi.oras.com/7405







7415

I (ISO 3822)
 EN 1111
 100 - 1000 kPa
 0.25 / 0.26 l/s (300 kPa)
 180 kPa (0.2 l/s)
 max. +65°C

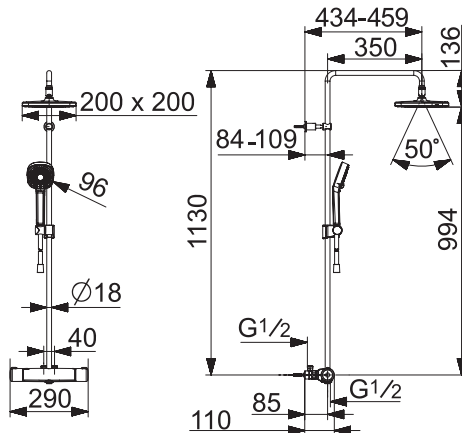

mpi.oras.com/7415

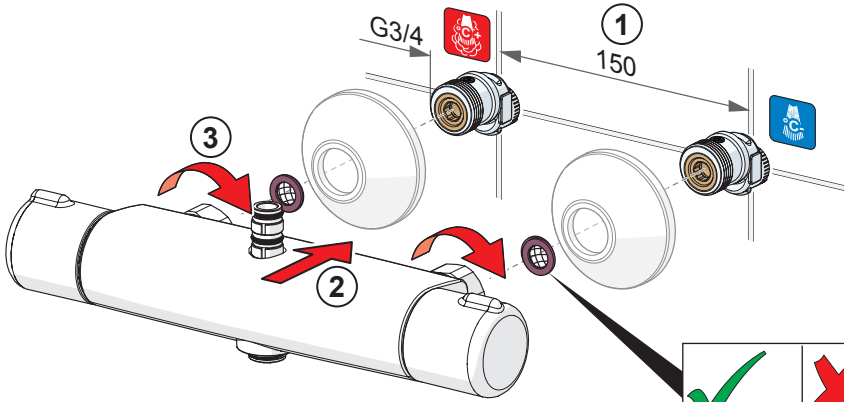

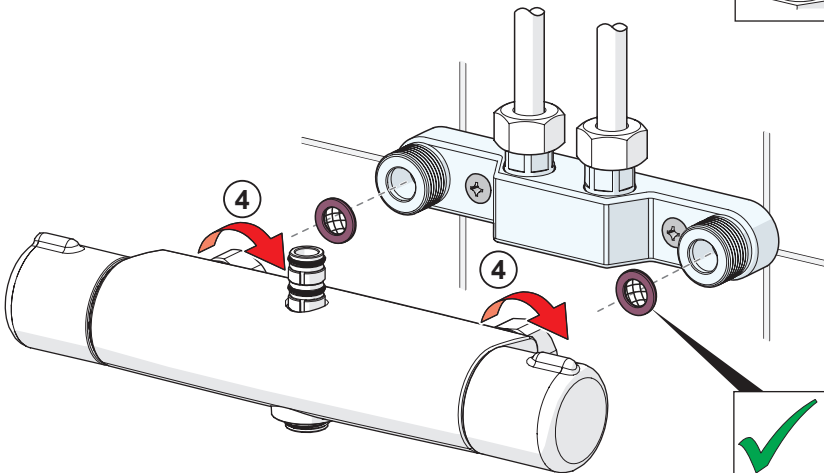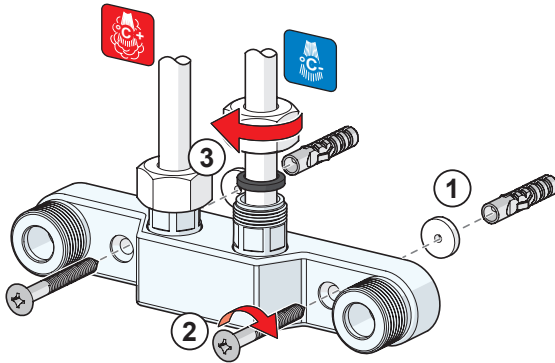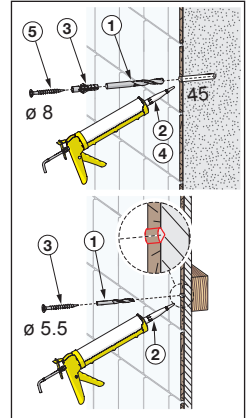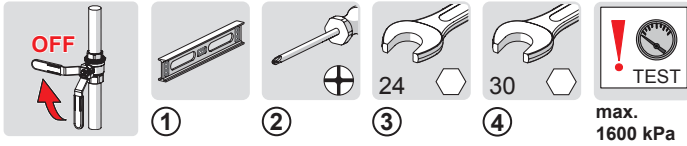




1




5







8








9








10


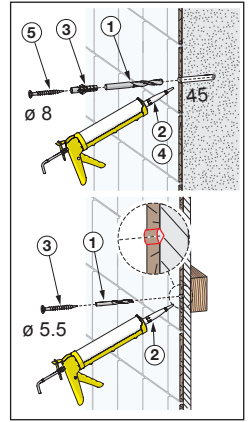
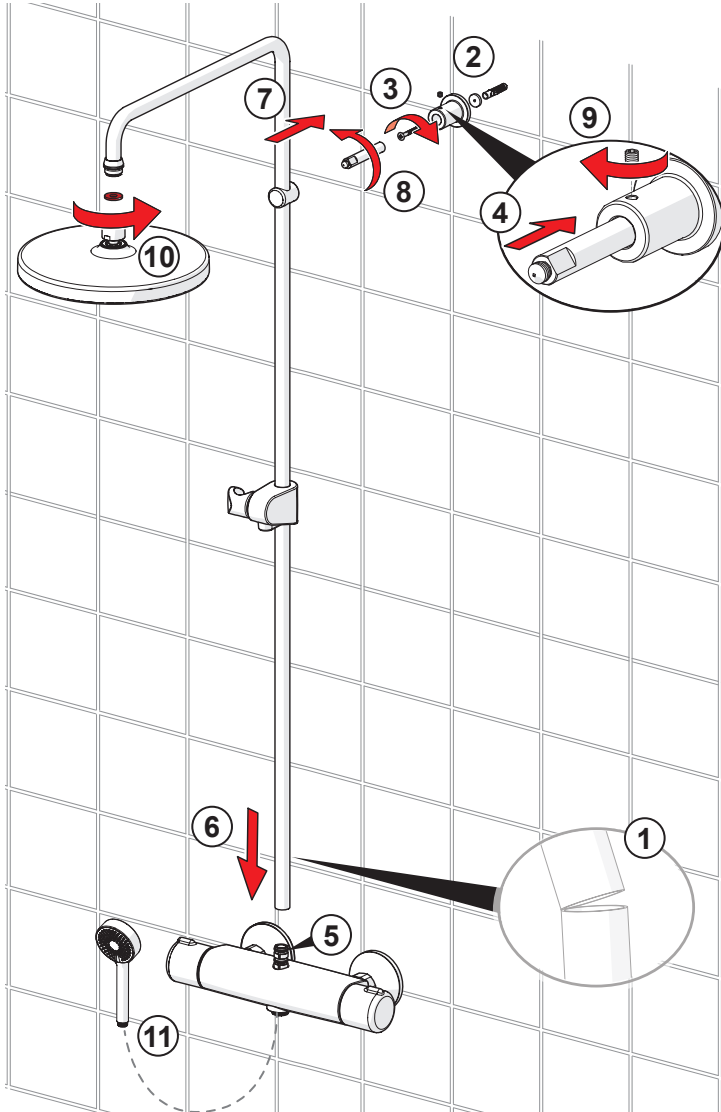




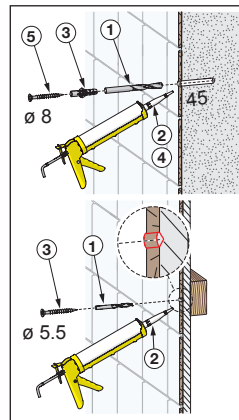
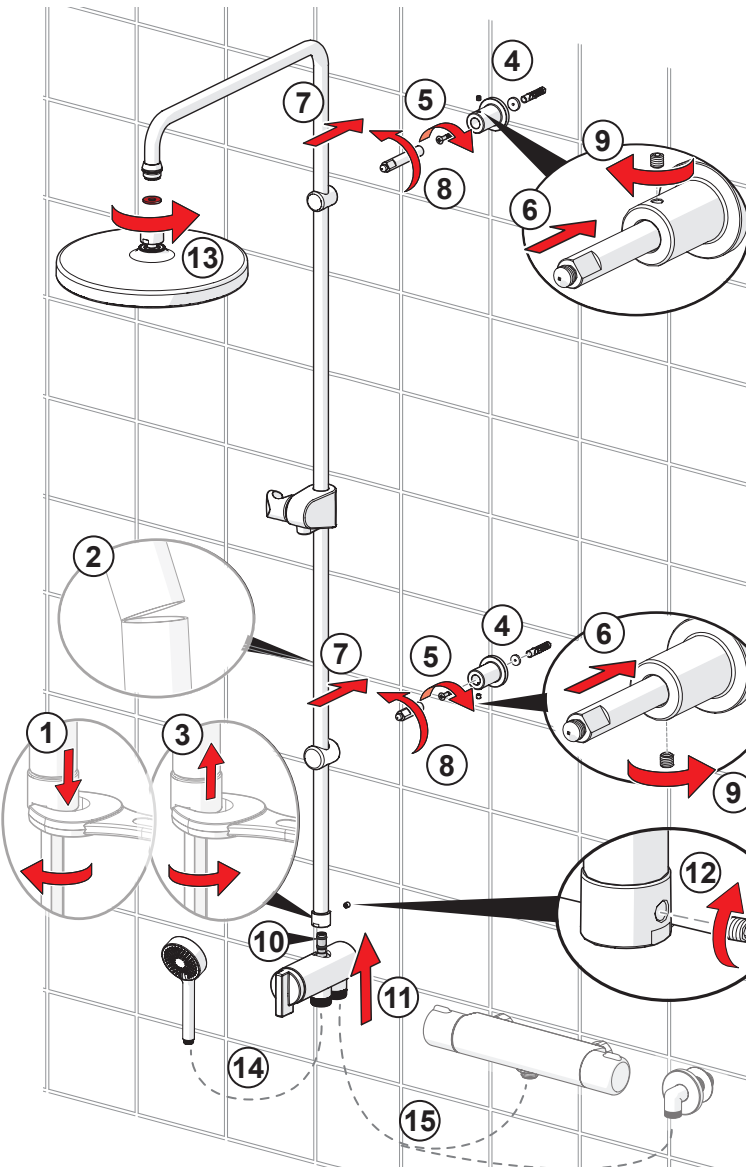
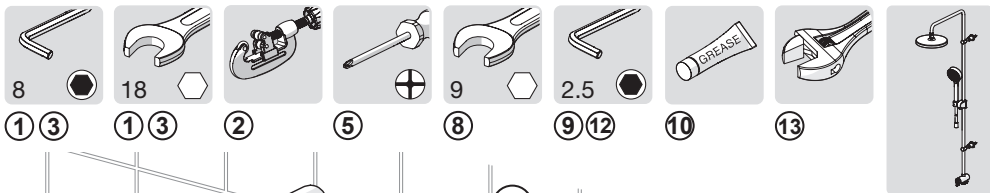






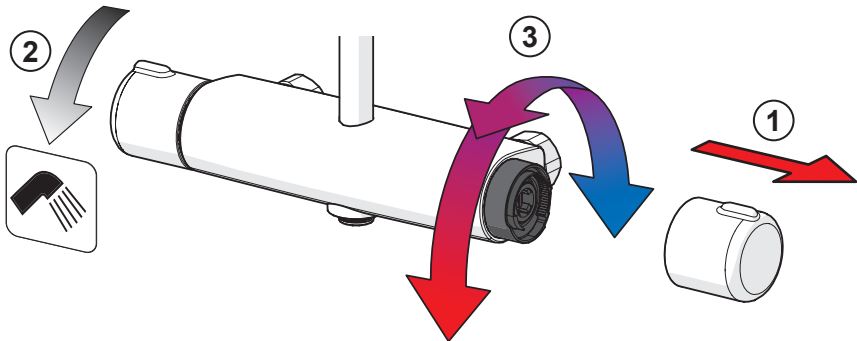
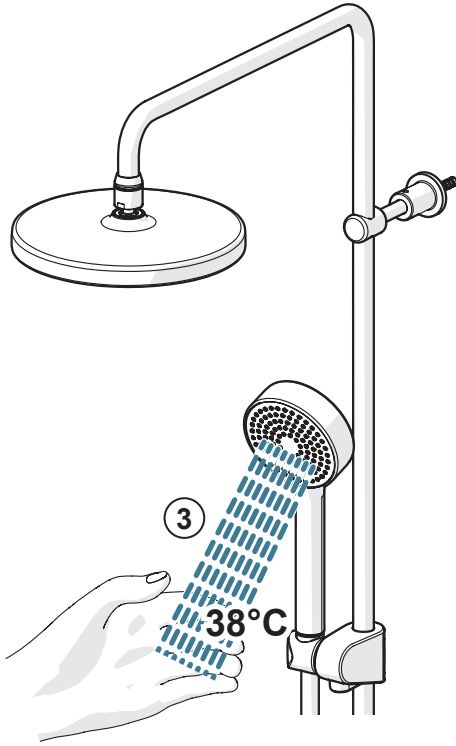





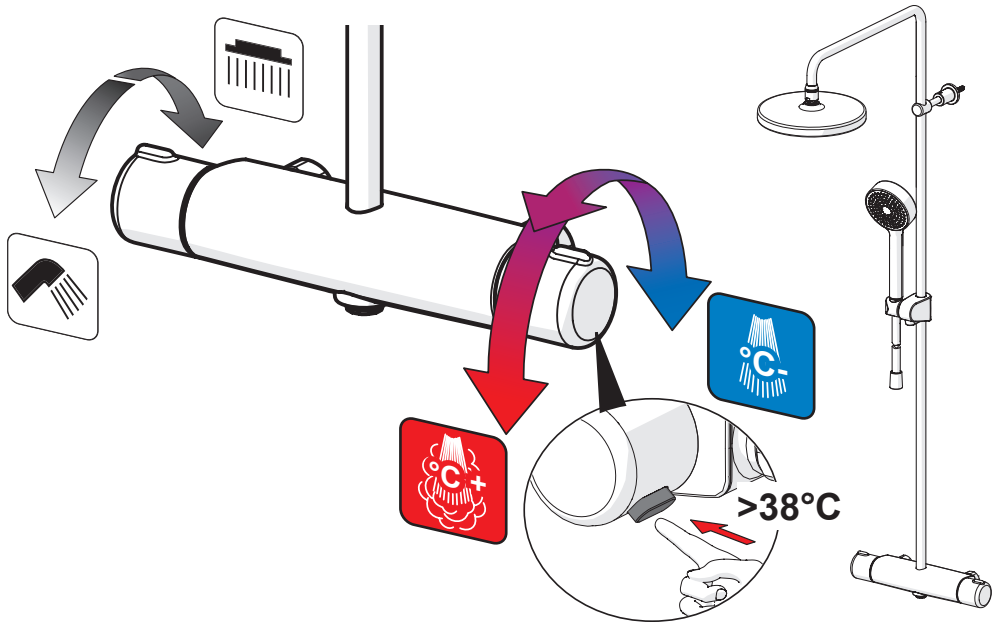
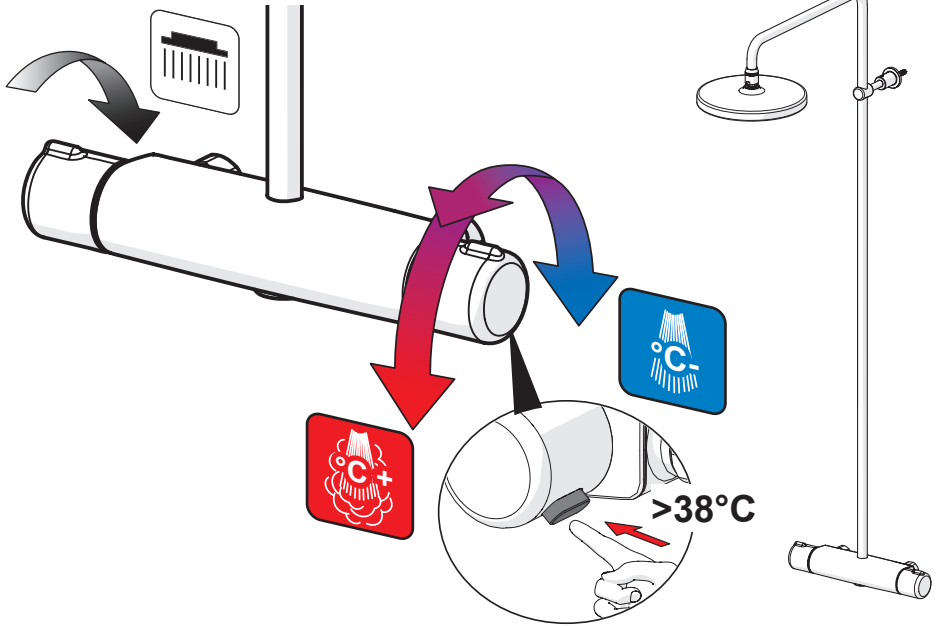




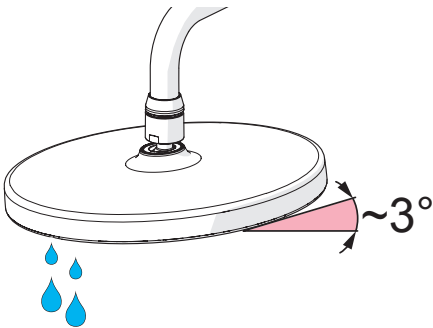
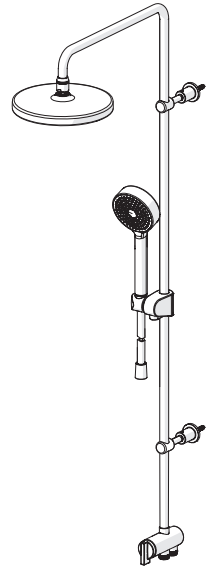
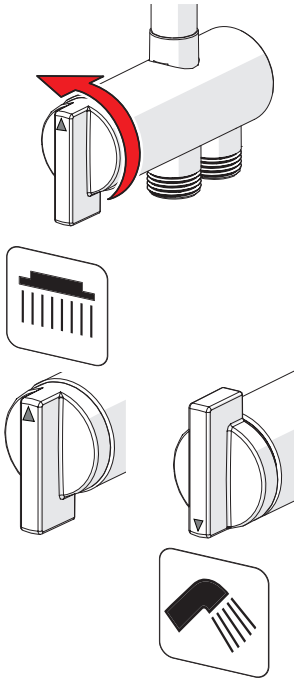


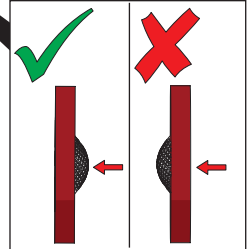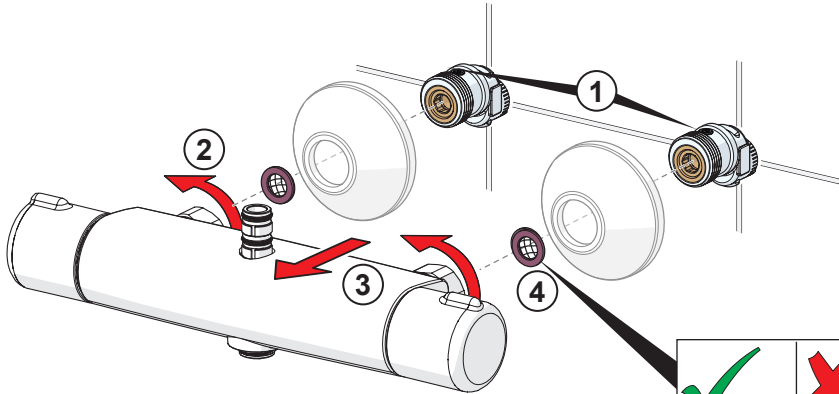



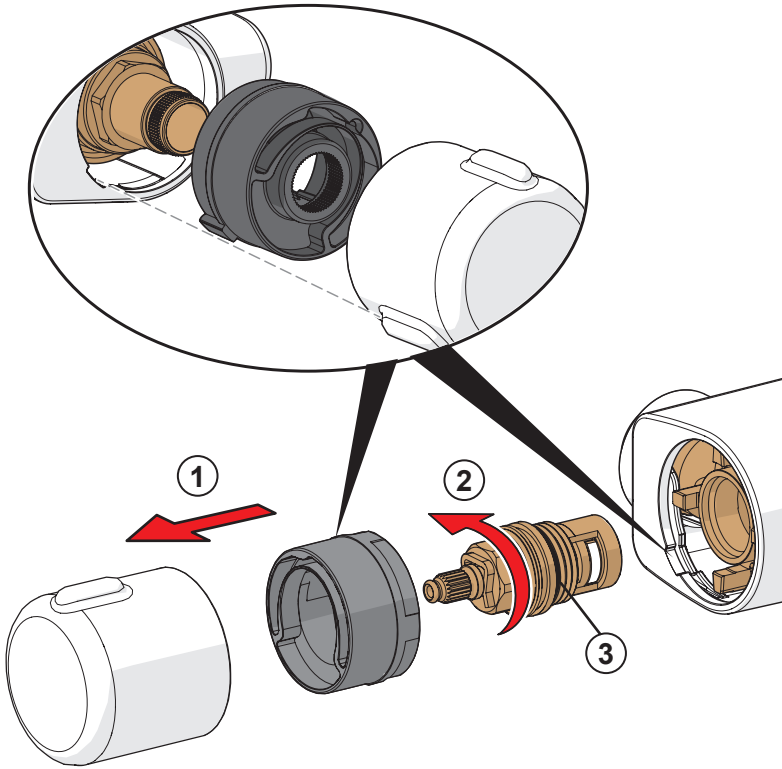

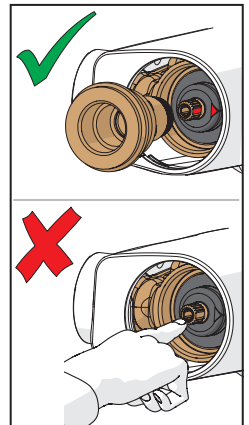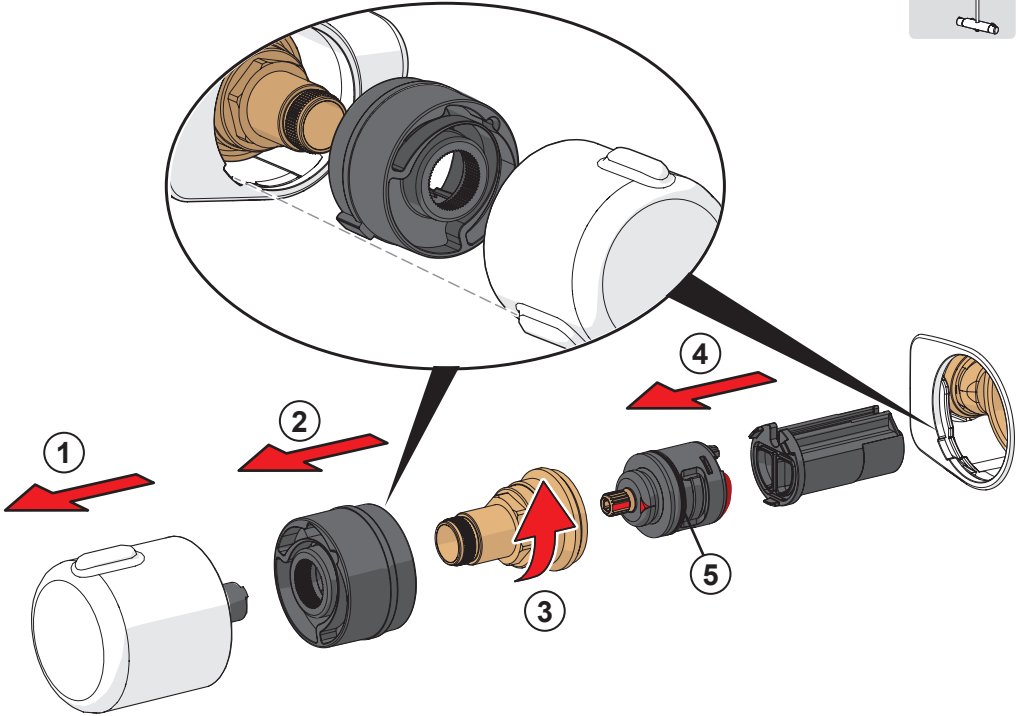

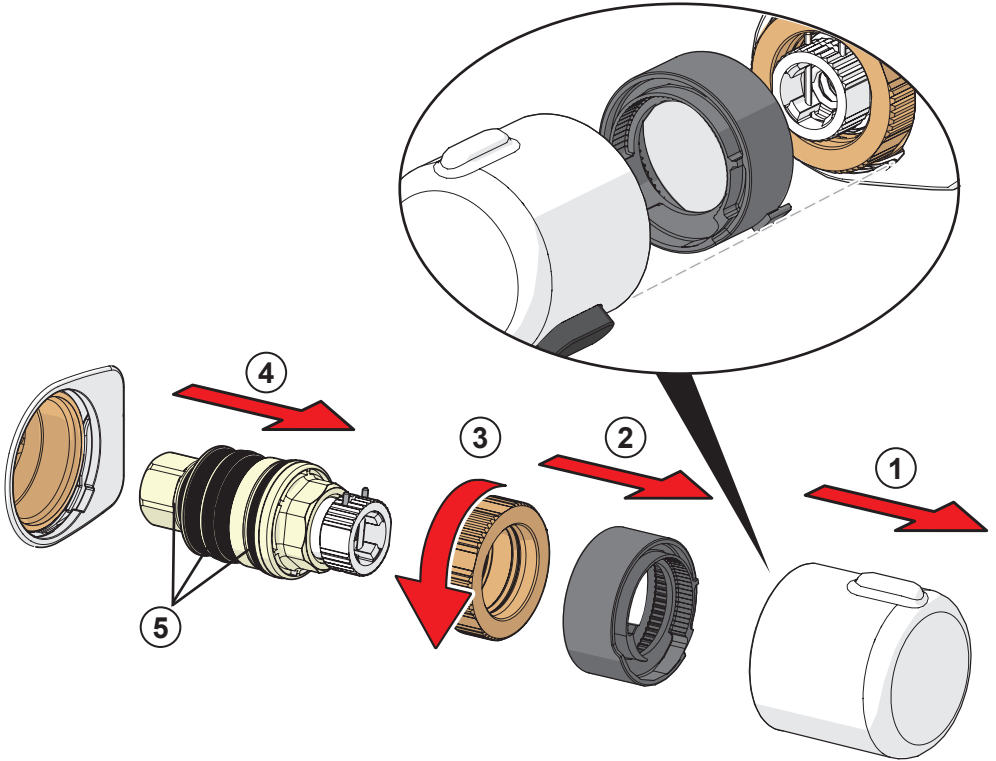

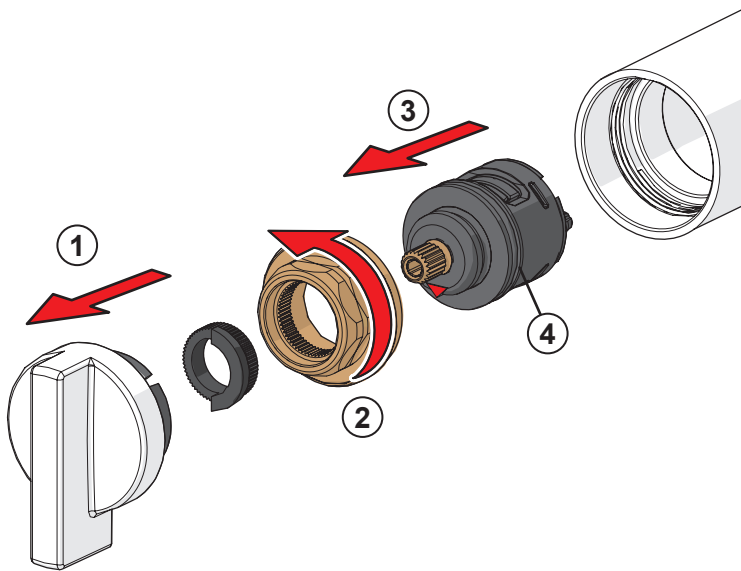

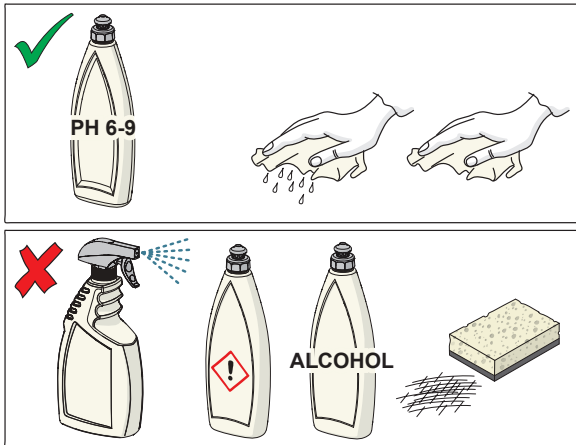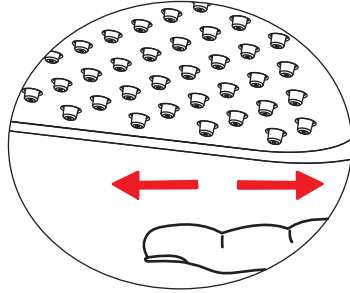

CLEANING.ORAS.COM

Oras Group is a powerful European provider of sanitary fittings: the market leader in the Nordics and a leading company in Continental Europe. The company's mission is to make the use of water easy and sustainable and its vision is to become the European leader of advanced sanitary fittings. Oras Group has two strong brands: Oras and Hansa.

The Group's head office is located in Rauma, Finland, and the Group has three manufacturing sites: Kralovice (Czech Republic), Olesno (Poland) and Rauma (Finland). Oras Group employs approximately 1,200 people in twenty countries. Oras Group is owned by Oras Invest, a family company and an industrial owner.

ORAS Ltd
Isometsäntie 2, P.O. Box 40
FI-26101 Rauma
Tel. +358 2 83 161
Fax +358 2 831 6300
info.finland@oras.com
www.oras.com



943423-11-20